


SPECIFICATION OF SAW FILTER

YOKETAN CORP.

Spec no: F11F-04480-006-NJ-A

1. Type : F11

2. Product Dimension

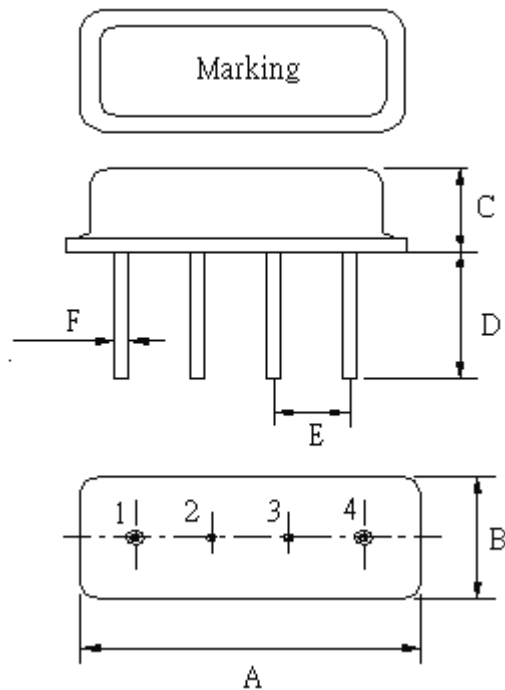


Pin	Configuration
1	Input / Output
4	Output/Input
2,3	Case Ground

Sign	Data (unit: mm)	Sign	Data(unit: mm)
A	11.0±0.3	E	2.54±0.2
B	4.5±0.3	F	0.45±0.2
C	3.2±0.3		
D	5.0±0.5		

SPECIFICATION OF SAW FILTER

YOKETAN CORP.

3. Test Circuit

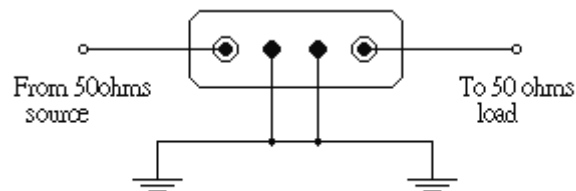

4. Performance

4-1. Maximum Ratings

Rating	Value	Units
CW RF Power Dissipation	+10	dBm
DC Voltage Between Any Two Pins	±30V	VDC
Case Temperature	-40 to +85	


4-2. Electronic Characteristics

Item	Min.	Typ.	Max.	Units
Center Frequency f_c (center frequency between 3dB points)	--	448.00	--	MHz
Using Passband BW	--	±3.0		MHz
Insertion Loss IL				
DC to $f_c-30.0\text{MHz}$	50	--	--	dB
$f_c \pm 3.0\text{MHz}$	--	3.5	5.0	
$f_c+30.0\text{MHz}$ to $f_c+200.0\text{MHz}$	50	--	--	
Ripple (with $f_c \pm 3.0\text{MHz}$)	--	2.5	--	dB
Input / Output Impedance (Nominal)	50Ω//0pF			

SPECIFICATION OF SAW FILTER

YOKETAN CORP.

5. Frequency Response

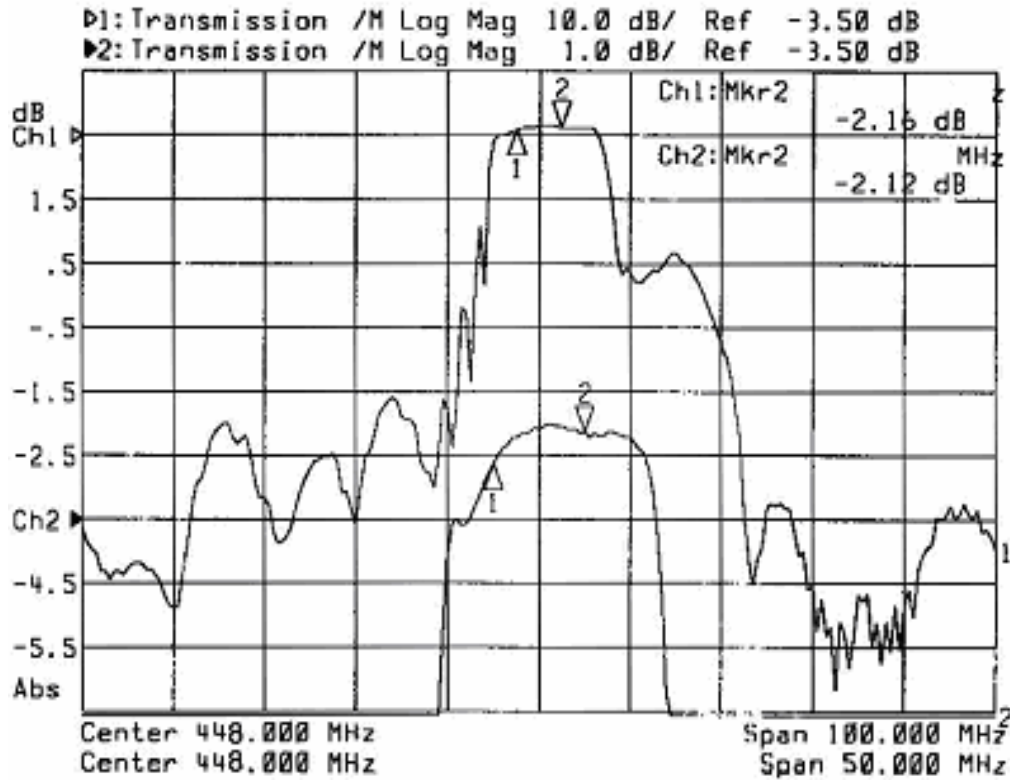

6 Notice

Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with $VSWR \leq 1.2:1$. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.