

SMD Programmable LVPECL Crystal OSC 5.0*3.2*1.3mm (SO5032CP PG type)

Features


- ▶ PLL solution.
- ▶ Wide frequency range.
- ▶ Featuring reflow solder.
- ▶ RoHS compliant and lead free.

RoHS / Pb Free

Specifications

Type	SMD Programmable LVPECL Crystal OSC 5.0*3.2*1.3mm
Freq. range	200.0 ~ 800.0MHz
Frequency Stability	±10ppm ~ ±100ppm
Operating Temperature Range	-20~+70°C (-40~+85°C is available)
Storage Temperature Range	-55~+125°C
Supply Voltage	2.5V , 3.3V
Phase Jitter RMS (12kHz~20MHz)	2.0ps
Output Voltage Level	Vol: Vcc-1.620 Max. / Voh: Vcc-1.025 Min.
Supply Current	70mA Max.
Output Load	50 Ohms (terminus to Vcc-2V)
Output Symmetry	45~55%
Rise Time/Fall Time	1nS Max. / 20%~80% output swing level
Min. Packing	1,000pcs/Reel

Dimensions (Unit:mm)

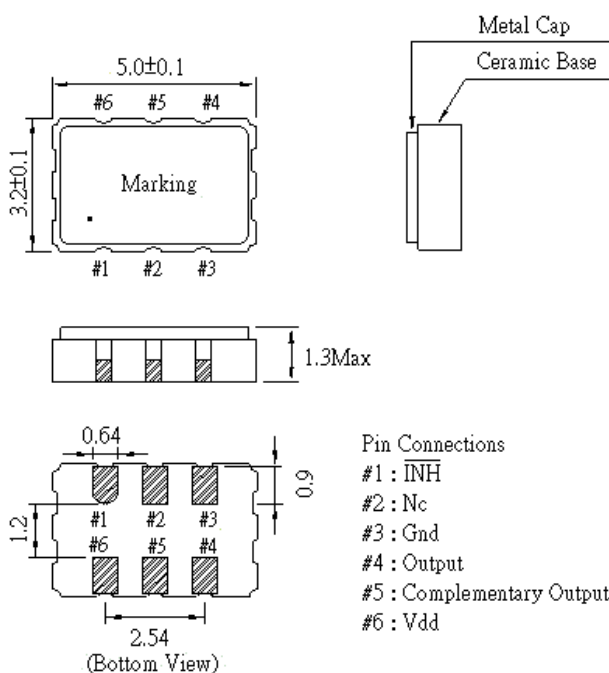

*Specifications described are subject to change without notice for improvement.