

## SMD LVPECL Crystal OSC 5.0\*3.2\*1.3mm (SO5032CP)

### Features


- ▶ LV-PECL output.
- ▶ Low phase noise.
- ▶ RoHS compliant and lead free.

RoHS / Pb Free

### Specifications

Type	SMD LVPECL Crystal OSC 5.0*3.2*1.3mm
Freq. range	13.5 ~ 212.5MHz
Frequency Stability	±20ppm , ±100ppm
Operating Temperature Range	-20 ~ +70°C (-40~+85°C is available)
Storage Temperature Range	-55~+125°C
Supply Voltage	2.5V , 3.3V
Phase Jitter RMS	1.0ps
Output Voltage Level	Vol: Vcc-1.620 Max. / Voh: Vcc-1.025 Min.
Supply Current	80mA Max.
Output Load	50 Ohms (terminus to Vcc-2V)
Output Symmetry	45~55%
Rise Time/Fall Time	1nS Max. / 20%~80% output swing level
Min. Packing	1,000pcs/Reel

### Dimensions (Unit:mm)

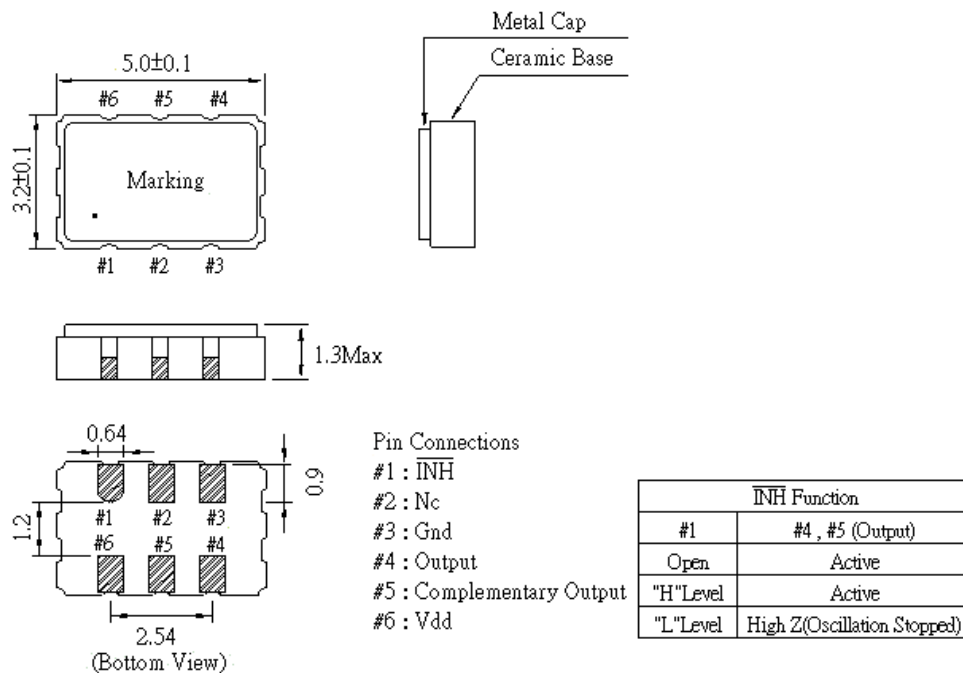

\*Specifications described are subject to change without notice for improvement.