

## SMD Programmable LVDS VCXO 5.0\*3.2\*1.3mm (SV5032CL PG type)

RoHS / Pb Free


### Features

- ▶ PLL solution.
- ▶ Wide frequency range.
- ▶ Featuring reflow solder.
- ▶ RoHS compliant and lead free.

### Specifications

Type	SMD Programmable LVDS VCXO 5.0*3.2*1.3mm
Freq. Range	200.0 ~ 800.0MHz
Supply Voltage(Vdc)	2.5V , 3.3V
Supply Current	50mA Max.
Frequency Stability	±10ppm ~ ±100ppm
Frequency Adjustment Range	±50ppm Min. , ±100ppm Min.
Operating Temperature Range	-20~+70°C (-40~+85°C is available)
Storage Temperature Range	-55~+125°C
Output Symmetry	45~55%
Rise Time/Fall Time	1nS Max. / 20%~80% output swing level
Output Voltage Level	Vol : 0.9V Min. / Voh: 1.6V Max.
Output Load	100 Ohms (OUT - OUTN differential)
Phase Jitter RMS (12kHz~20MHz)	2.0ps
Min. Packing	1,000pcs/Reel

### Dimensions (Unit:mm)

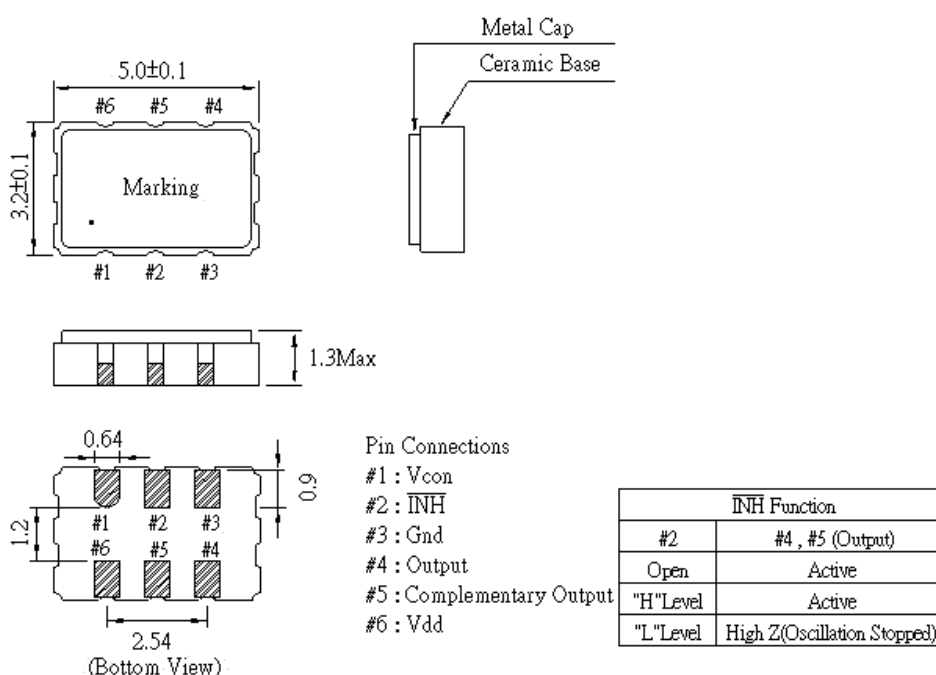

\*Specifications described are subject to change without notice for improvement.